

RYOBI®



REGISTERED TO
ISO9002
CERTIFICATE
NO.A5324



Steel

Alumi.

Stain.

2Speed



Closing position adjustable

Clearance adjustable


90°HO

NOHO

R and L

108°

300,000 cycles

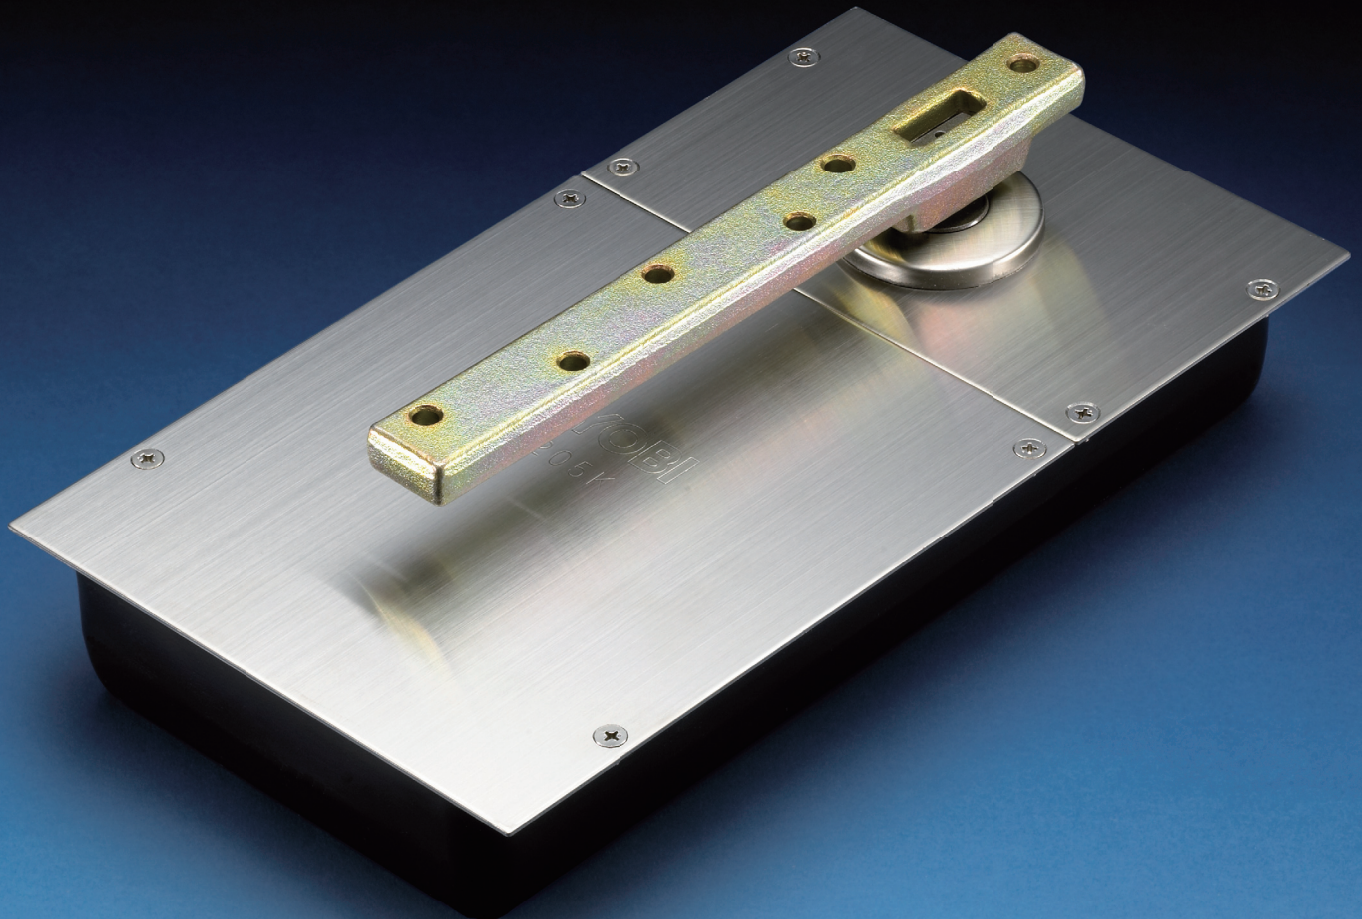

Floor Hinge **RYOBI**
205K/S-205K

Floor Hinge **RYOBI 205K/S-205K**


■ APPLICATION

MODEL	HOLD OPEN	MAX. DOOR SIZE		CEMENT CASE DIMENSIONS		
		WIDTH(mm)	WEIGHT(kg)	LENGTH(mm)	WIDTH(mm)	DEPTH(mm)
205K	WITHOUT HOLD OPEN	1,200	300	298	146	47
S-205K	WITH 90° HOLD OPEN					

■ HEAVY DUTY

- Heavy duty door up to 300kg.

Applicable door size

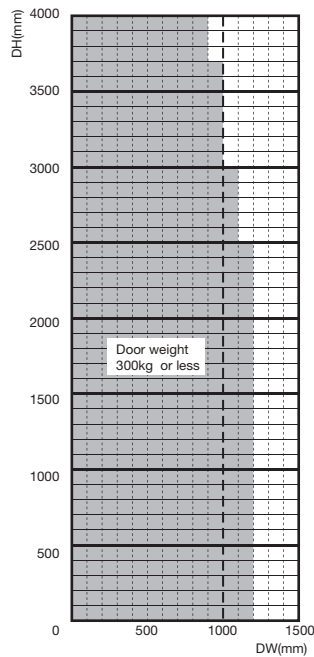

■ LOW COST

- The best balance of quality and price.
- Trouble-free quality.

■ QUALITY ASSURED

- Higher opening/closing efficiency by precise machined ball bearing and special hart-cam mechanism.
- 300,000 cycles tested.
- For all temperatures with using -40°C fluid point oil.


■ EASIEST INSTALLATION AND ADJUSTMENT

- Easy adjustment of door position and clearance.
- Independent adjustment of door closing speed and latching speed.


■ UNIVERSAL USE

- Non-handed, and double actions.
- Hold open angle 90°, Max. opening angle 108°


■ ADJUSTING DOOR POSITION AND CLOSING SPEED

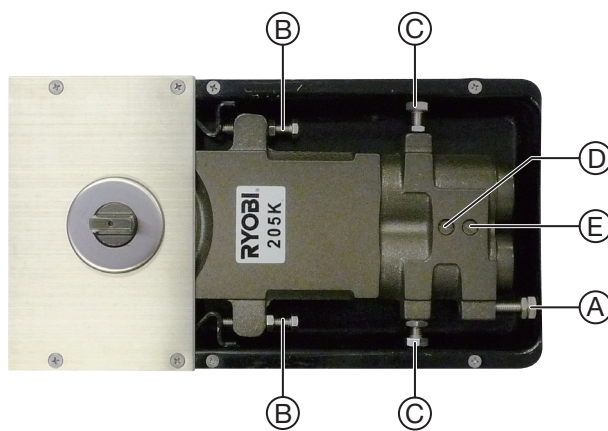


- Clearance adjustable by A and B.

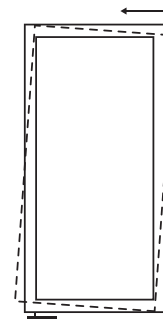

- Closing position adjustable by C.




- ① Closing speed adjustable by D.
- ② Latching speed adjustable by E.



Floor Hinge **RYOBI 205K/S-205K**

DRAWING

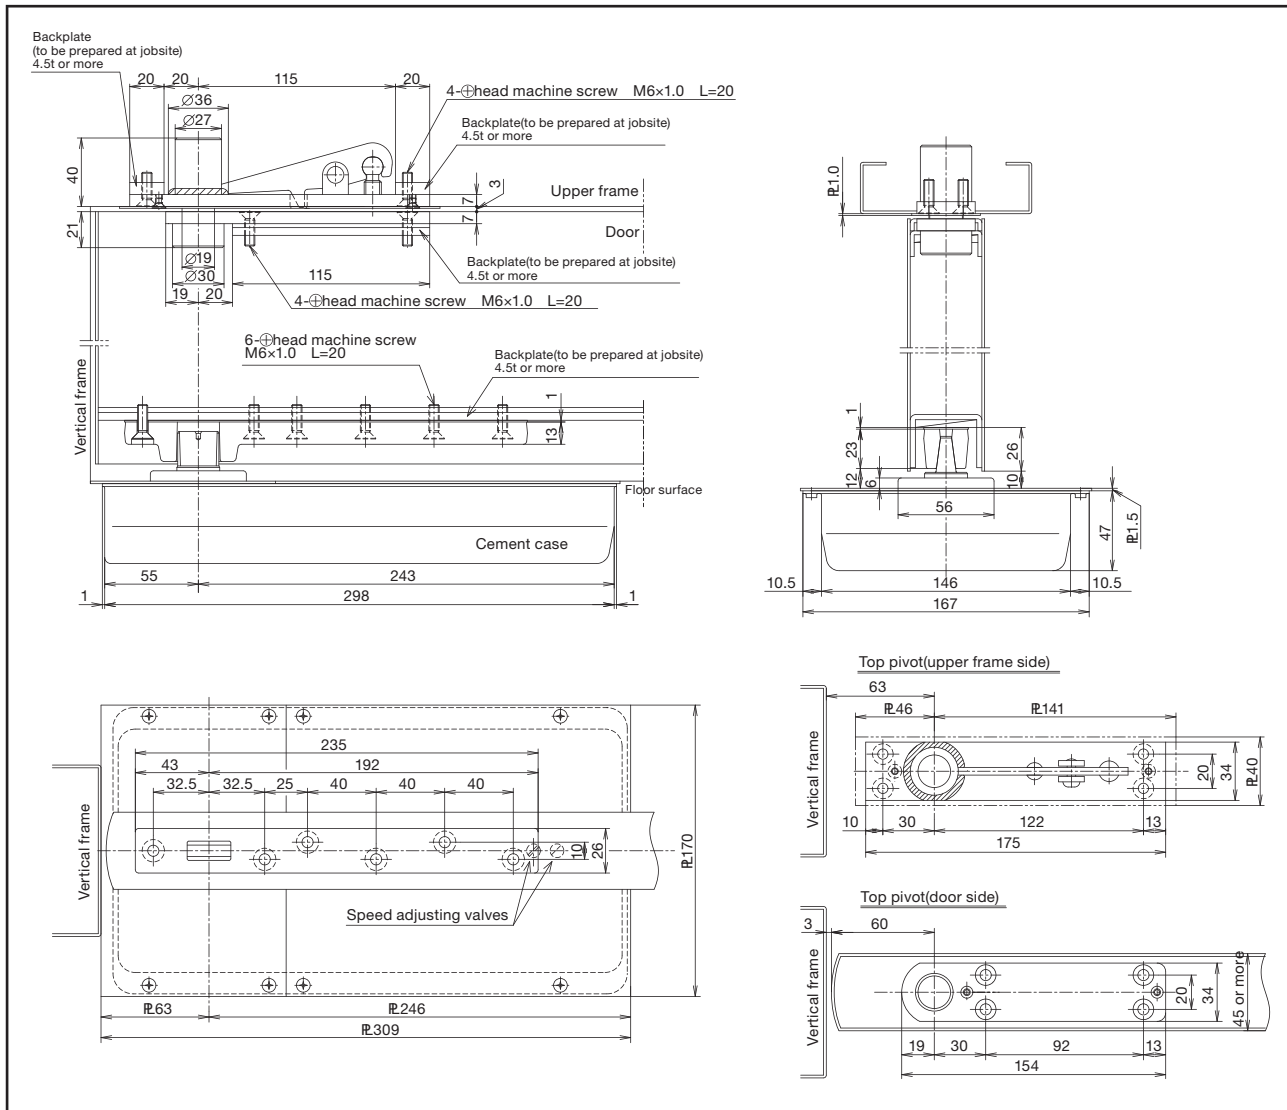

DISTRIBUTED BY

RYOBI LIMITED

5-2-8 Toshima, Kita-ku Tokyo 114-8518, Japan

Tel. 81-3-3927-5536 Fax. 81-3-3927-5527

RYOBI is a registered trade mark of Ryobi Limited